

POWERSTREAM 9.5kW Range - Unvented Instantaneous Water Heater

Instantaneous Water Heater

Powerstream delivers instant hot water at point of use. This compact and unique design eliminates the need for centrally stored hot water cylinders saving on electricity usage and important space.

Key Features

- Water supplied to one or two outlets (either one shower and one hand basin or two hand basins).
- Water outlet via existing tap or mixer (especially via spray tap).
- Direct mains supply.
- Small compact shape.
- No standing heat losses.
- Fast response.
- Two heat settings.
- Neon “power on” indicator.
- The Powerstream range is not suitable for bath installations, due to temperature loss when filling the bath.


Flow Rate/ Performance (Winter/ Summer)

Approximate water temperature which can be expected from Powerstream for different flow rates. The temperature of the mains supply can vary from 5°C in winter up to about 20°C in summer, with a max mean average of about 12°C.



Dimensions (mm)

POWERSTREAM

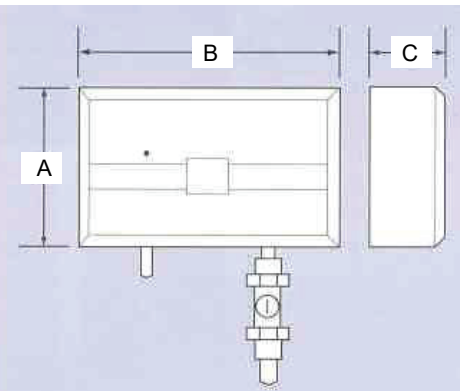

A - Height	160mm
B - Width	307mm
C - Depth	74mm

Specifications

Flow rate:	Winter/ Summer
4lts/ min:	39 - 54°C
5lts/ min:	32 - 47°C
6lts/ min:	28- 42°C
Fuse rating:	40 amps.
kW loading:	8.7 - 9.5 kW

Model	4lts/ min	5lts/ min	6lts/ min
9.5 kW	39/ 54°C	32/ 47°C	28/ 42°C